| 150# BLEEDER/VENT BLIND V-NOTCH | | | | | | | |
|---------------------------------|----------|------|---------|-----------|----------|----------|-----------|
| SIZE | OD | L | W | Z | FD | PD | PS |
| 1.00 | 2.50 in | 4 in | 1.00 in | 0.354 in | 0.825 in | 1.346 in | 0.957 in |
| 2.00 | 4.00 in | 4 in | 1.00 in | 0.845 in | 0.825 in | 1.481 in | 1.939 in |
| 3.00 | 5.25 in | 4 in | 1.00 in | 1.260 in | 0.929 in | 1.859 in | 2.900 in |
| 4.00 | 6.75 in | 4 in | 1.00 in | 1.663 in | 1.025 in | 2.362 in | 3.826 in |
| 5.00 | 7.62 in | 4 in | 1.00 in | 2.157 in | 1.025 in | 2.304 in | 4.813 in |
| 6.00 | 8.62 in | 4 in | 1.00 in | 2.631 in | 1.025 in | 2.330 in | 5.761 in |
| 8.00 | 10.88 in | 4 in | 1.00 in | 3.563 in | 1.025 in | 2.528 in | 7.625 in |
| 10.00 | 13.25 in | 5 in | 1.00 in | 4.625 in | 1.025 in | 2.650 in | 9.750 in |
| 12.00 | 16.00 in | 5 in | 1.50 in | 5.625 in | 1.025 in | 3.025 in | 11.750 in |
| 14.00 | 17.62 in | 5 in | 1.50 in | 6.250 in | 1.025 in | 3.210 in | 13.000 in |
| 16.00 | 20.12 in | 5 in | 1.50 in | 7.250 in | 1.025 in | 3.460 in | 15.000 in |
| 18.00 | 21.50 in | 5 in | 1.50 in | 8.250 in | 1.025 in | 3.150 in | 17.000 in |
| 20.00 | 23.75 in | 5 in | 1.50 in | 9.250 in | 1.025 in | 3.275 in | 19.000 in |
| 24.00 | 28.12 in | 5 in | 1.50 in | 11.250 in | 1.025 in | 3.460 in | 23.000 in |

| NPT TAPS | | | | |
|----------|----------|---------|--|--|
| NPT | PT | *PTD | | |
| 1/8-27 | 0.332 in | 0.62 in | | |
| 1/4-18 | 0.438 in | 0.75 in | | |
| 3/8-18 | 0.562 in | 1.00 in | | |
| 1/2-14 | 0.703 in | 1.25 in | | |

| SW PORTS | | | | |
|----------|---------|---------|--|--|
| SW | CB_ID | CBD | | |
| 1/8 in | 0.42 in | 0.44 in | | |
| 1/4 in | 0.56 in | 0.44 in | | |
| 3/8 in | 0.69 in | 0.44 in | | |
| 1/2 in | 0.88 in | 0.50 in | | |

NOTES:

OD = PER ASME B16.48.


Z = ("PS" - "F")/2 UNLESS SPECIFIED DIFFERENT BY CUSTOMER. "F" = \emptyset .25" LINE SIZE 2" AND BELOW, \emptyset .38 FOR 3" LINE SIZE, AND \emptyset .50 FOR LINE SIZE 4" AND LARGER.


UNLESS SPECIFIED DIFFERENT BY CUSTOMER DRILL "F" = "P" . "PD" = ("OD" / 2) - "Z") + "F".

TAP DRILL SIZE "PT" = TAP DRILL SIZE FOR THE TAP.

UNLESS SPECIFIED OTHERWISE, THE V-NOTCH HANDLE IS 90 DEG FROM TAP.

ALL DEPTH DIMENSIONS "FD", "PD", AND "PTD" ARE TO DRILL TIP. PIPE SCHEDULE ID IS XH UNLESS SPECIFIED OTHERWISE. *DEPTH OF PTD WILL BE LESS FOR 3" AND UNDER.

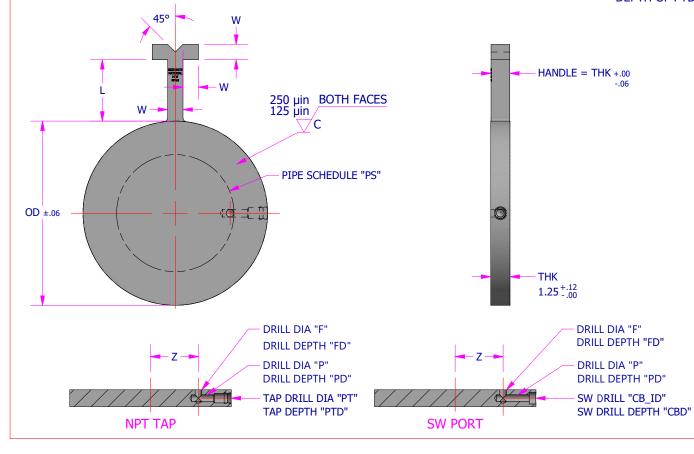

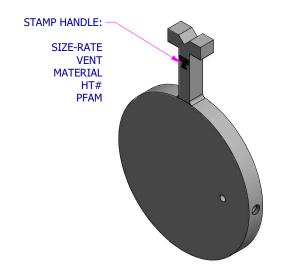

| DRAWN BY BAH | DATE 2/20/2020 | | _ | |
|---|----------------|-----|---|--|
| APPROVED BY SB | DATE 2/20/2020 | | 0 | |
| DESCRIPTION 150# BLEEDER/VENT BLIND V-NOTCH | | | | |
| DRAWING NUMBER | | RFV | | |

150 BBV MSTR



0