
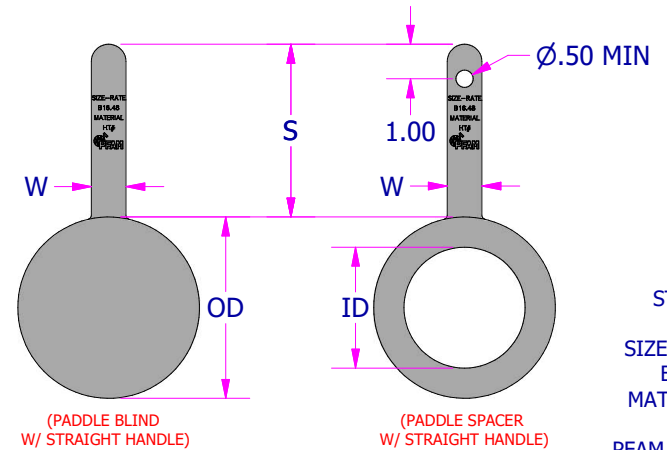
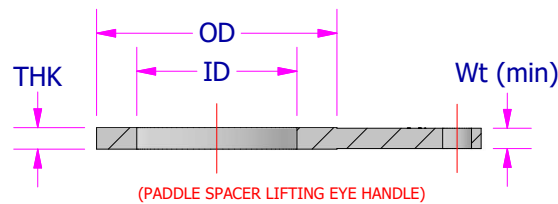
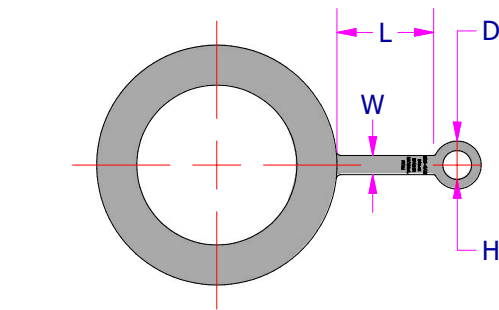
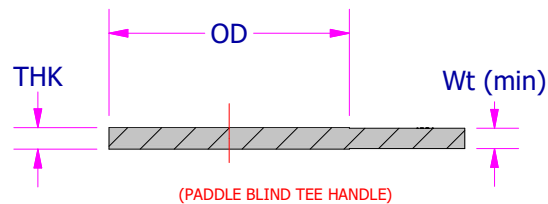


# 2500# PADDLE BLIND / PADDLE SPACER

| SIZE  | THK   | OD     | ID     | W     | Wt (MIN) | L     | S     | D     | H     |
|-------|-------|--------|--------|-------|----------|-------|-------|-------|-------|
| 0.5"  | 0.38" | 2.62"  | 0.62"  | 1.00" | 0.25"    | 4.00" | 5.00" | 1.50" | 0.50" |
| 0.75" | 0.38" | 2.88"  | 0.82"  | 1.00" | 0.25"    | 4.00" | 5.00" | 1.50" | 0.50" |
| 1"    | 0.38" | 3.25"  | 1.05"  | 1.00" | 0.25"    | 4.00" | 5.00" | 1.50" | 0.50" |
| 1.25" | 0.50" | 4.00"  | 1.38"  | 1.00" | 0.25"    | 4.00" | 5.00" | 1.50" | 0.50" |
| 1.5"  | 0.62" | 4.50"  | 1.61"  | 1.00" | 0.25"    | 4.00" | 5.00" | 1.50" | 0.50" |
| 2"    | 0.62" | 5.56"  | 2.07"  | 1.00" | 0.25"    | 4.00" | 5.00" | 2.00" | 0.75" |
| 2.5"  | 0.75" | 6.50"  | 2.47"  | 1.00" | 0.38"    | 4.00" | 5.00" | 2.00" | 0.75" |
| 3"    | 0.88" | 7.62"  | 3.07"  | 1.00" | 0.38"    | 4.00" | 5.00" | 2.00" | 0.75" |
| 4"    | 1.12" | 9.12"  | 4.03"  | 1.00" | 0.50"    | 5.00" | 6.00" | 2.00" | 0.75" |
| 5"    | 1.38" | 10.88" | 5.05"  | 1.00" | 0.62"    | 5.00" | 6.00" | 2.00" | 0.75" |
| 6"    | 1.62" | 12.38" | 6.06"  | 1.50" | 0.75"    | 6.00" | 7.50" | 2.50" | 1.50" |
| 8"    | 2.12" | 15.12" | 7.81"  | 1.50" | 1.00"    | 7.00" | 8.50" | 2.50" | 1.50" |
| 10"   | 2.62" | 18.62" | 9.75"  | 1.50" | 1.25"    | 7.00" | 8.50" | 3.00" | 1.50" |
| 12"   | 3.12" | 21.50" | 11.37" | 1.50" | 1.50"    | 8.00" | 9.50" | 3.00" | 1.50" |

125-250 RMS ALL FACES

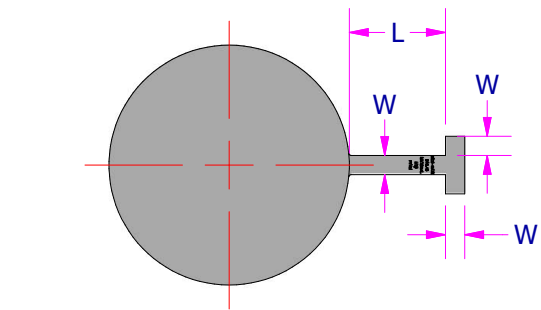

STAMP:

SIZE-RATE  
B16.48  
MATERIAL  
HT #  
PFAM LOGO

|                                                                   |                    |
|-------------------------------------------------------------------|--------------------|
| DRAWN BY<br>BAH                                                   | DATE<br>5/21/2020  |
| APPROVED BY<br>S.B.                                               | DATE<br>12/31/2024 |
| DESCRIPTION<br>2500# PADDLE BLINDS & PADDLE SPACERS - ASME B16.48 |                    |
| DRAWING NUMBER<br>2500 PBPS TES                                   | REV<br>1           |



NOTE: OPTIONAL RAISED FACE AVAILABLE.

\*\* ALL DIMENSIONS ARE IN INCHES.