
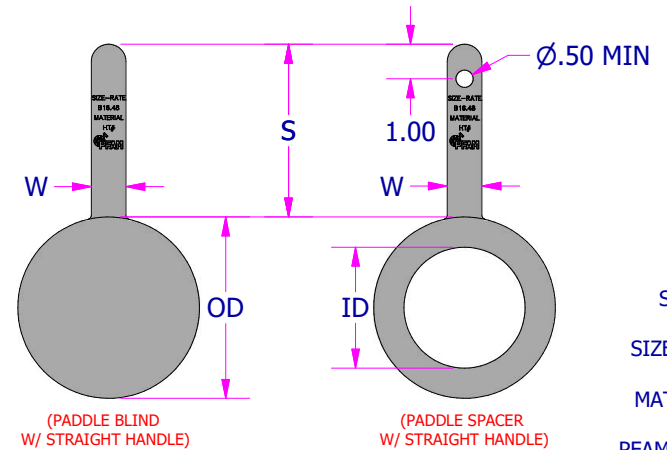
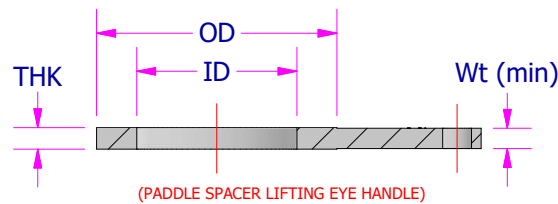
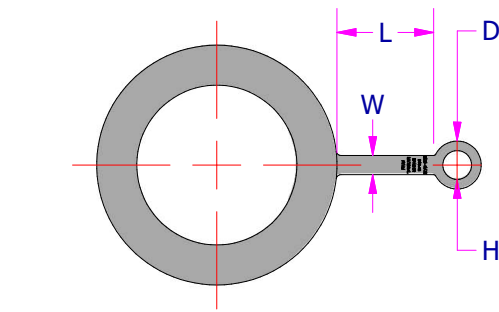
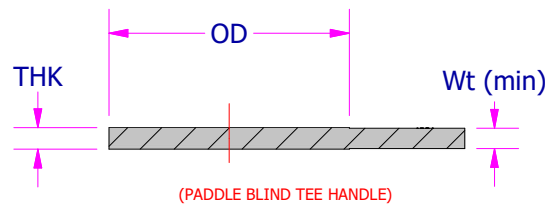


900# PADDLE BLIND / PADDLE SPACER

SIZE	THK	OD	ID	W	Wt (MIN)	L	S	D	H
0.5"	0.25"	2.38"	0.62"	1.00"	0.12"	4.00"	5.00"	1.50"	0.50"
0.75"	0.25"	2.62"	0.82"	1.00"	0.12"	4.00"	5.00"	1.50"	0.50"
1"	0.25"	3.00"	1.05"	1.00"	0.12"	4.00"	5.00"	1.50"	0.50"
1.25"	0.38"	3.38"	1.44"	1.00"	0.25"	4.00"	5.00"	1.50"	0.50"
1.5"	0.38"	3.75"	1.68"	1.00"	0.25"	4.00"	5.00"	1.50"	0.50"
2"	0.50"	5.50"	2.16"	1.00"	0.25"	4.00"	5.00"	2.00"	0.75"
2.5"	0.50"	6.38"	2.64"	1.00"	0.25"	4.00"	5.00"	2.00"	0.75"
3"	0.62"	6.50"	3.26"	1.00"	0.25"	4.00"	5.00"	2.00"	0.75"
4"	0.75"	8.00"	4.26"	1.00"	0.38"	4.00"	5.00"	2.00"	0.75"
5"	0.88"	9.62"	5.30"	1.00"	0.38"	5.00"	6.00"	2.00"	0.75"
6"	1.00"	11.25"	6.36"	1.00"	0.50"	5.00"	6.00"	2.50"	1.50"
8"	1.38"	14.00"	8.33"	1.00"	0.62"	5.00"	6.00"	2.50"	1.50"
10"	1.62"	17.00"	10.42"	1.00"	0.75"	6.00"	7.00"	3.00"	1.50"
12"	1.88"	19.50"	12.39"	1.00"	0.75"	6.00"	7.00"	3.00"	1.50"
14"	2.12"	20.38"	13.62"	1.50"	1.00"	6.00"	7.50"	3.00"	1.50"
16"	2.38"	22.50"	15.62"	1.50"	1.25"	6.00"	7.50"	3.00"	1.50"
18"	2.62"	25.00"	17.62"	1.50"	1.50"	6.00"	7.50"	3.00"	1.50"
20"	2.88"	27.38"	19.56"	1.50"	1.50"	6.00"	7.50"	3.00"	1.50"
24"	3.50"	32.88"	23.50"	1.50"	1.75"	6.00"	7.50"	3.00"	1.50"

125-250 RMS ALL FACES

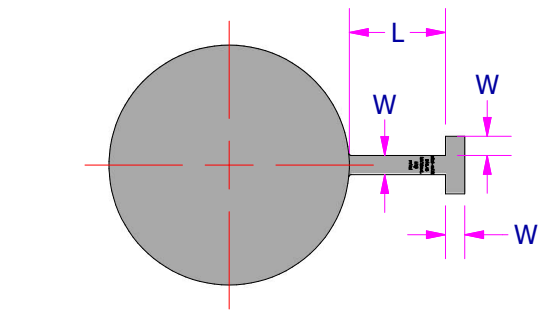

STAMP:

SIZE-RATE
B16.48
MATERIAL
HT#
PFAM LOGO

NOTE: OPTIONAL RAISED FACE AVAILABLE.

** ALL DIMENSIONS ARE IN INCHES.

DRAWN BY BAH	DATE 5/21/2020
APPROVED BY S.B.	DATE 12/31/2024
DESCRIPTION 900# PADDLE BLINDS & PADDLE SPACERS - ASME B16.48	
DRAWING NUMBER 900 PBPS TES	REV 1

